



# TERRA M20 IX.

È DISPONIBILE IN QUESTI COLORI:



GIALLO-NERO



ANTRACITE GLITTER (LUCIDO)  
/ NERO (OPACO)



NERO-BRIGHT RED (OPACO)

## SPECIFICHE E OPTIONAL

|                     |  |
|---------------------|--|
| <b>TELAIO</b>       | Orbea Terra carbon OMP disc, monocoque construction, tapered 1-1/8" - 1,5", PF30, powermeter compatible, Thru Axle 12mm x 142mm rear, thread M12x P1.5, internal cable routing, EC/DC compatible, SP 27,2mm. |
| <b>FORCELLA</b>     | Orbea Terra OMP carbon disc fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts Thru axle 12mm x 100mm, thread M12xP1.5, MMS system  |
| <b>GUARNITURA</b>   | Shimano GRX RX810 40t  |
| <b>SERIE STERZO</b> | FSA 1-1/8 - 1-1/2" Integrated Carbon Cup ACB Bearings  |
| <b>MANUBRIO</b>     | OC1 All Road, reach 80mm, drop 125mm, flare 12°  |
|                     | OC1 Road, reach 80mm, drop 125mm   |
|                     | OC1 Road, riser 15mm, reach 70mm, drop 125mm   |
|                     | OC2 Road Carbon, reach 80mm, drop 125mm  |
| <b>ATTACCO</b>      | OC2 Road -8°   |
| <b>LEVE</b>         | Shimano ST-RX810   |
| <b>FRENI</b>        | Shimano ST-RX810   |
| <b>PIGNONI</b>      | Shimano XT M8000 11-40t 11-Speed   |
| <b>CAMBIO</b>       | Shimano RX812 GS   |
| <b>CATENA</b>       | KMC X11  |
| <b>RUOTE</b>        | Orbea wheel: Ready GR with 12mm E-Thru hubset Shimano RS470 28H  |
|                     | Vision 40 SC Disc Carbon TLR CL  |
|                     | FULCRUM Racing 800 DB  |
|                     | FULCRUM Racing 700 DB  |
|                     | FULCRUM Rapid Red 900 DB AFS   |


## GEOMETRIA

| TAGLIA                  | XS    | S    | M    | L    | XL   |
|-------------------------|-------|------|------|------|------|
| <b>1 - SEAT_TUBE</b>    | 460   | 510  | 554  | 590  | 630  |
| <b>2 - TOP_TUBE</b>     | 531   | 543  | 555  | 570  | 585  |
| <b>3 - HEAD_TUBE</b>    | 122   | 138  | 156  | 182  | 212  |
| <b>4 - CHAIN_STAY</b>   | 430   |      |      |      |      |
| <b>5 - BB_HEIGHT</b>    | 283   | 283  | 285  | 285  | 288  |
| <b>6 - BB_DROP</b>      | 70    | 70   | 68   | 68   | 65   |
| <b>7 - WHEELBASE</b>    | 1017  | 1030 | 1043 | 1060 | 1078 |
| <b>8 - HEAD_ANGLE</b>   | 70.5° |      |      |      |      |
| <b>9 - SEAT_ANGLE</b>   | 73.5° |      |      |      |      |
| <b>10 - STANDOVER</b>   | 764   | 796  | 828  | 858  | 893  |
| <b>11 - REACH</b>       | 370   | 378  | 385  | 392  | 400  |
| <b>12 - STACK</b>       | 545   | 560  | 575  | 600  | 625  |
| <b>13 - FORK_LENGTH</b> | 400   |      |      |      |      |

## ERGONOMIA

| TAGLIA    | BIELLA | ATTACCHO | MANUBRIO |
|-----------|--------|----------|----------|
| <b>XS</b> | 170    | 100      | 420      |
| <b>S</b>  | 170    | 100      | 420      |
| <b>M</b>  | 172    | 110      | 420      |
| <b>L</b>  | 172    | 110      | 440      |
| <b>XL</b> | 175    | 120      | 440      |

\* La misura del manubrio è centro-Centro

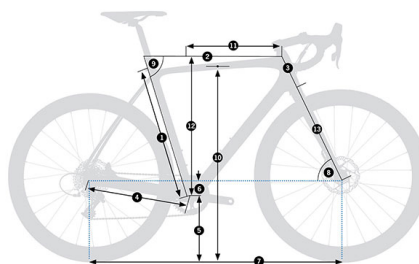

---

FULCRUM Rapid Red 500  
DB AFS

---

**PNEUMATICO**

Vittoria Terreno Dry  
Gravel G2.0 TNT  
700x38c

---

Vittoria Rubino Pro IV  
G2.0 TLR 700x28c

---

Hutchinson Fusion 5  
Performance TLR 700x30

---

**PEDALI**

N/A

---

**REGGISELLA**

OC2 27.2 Offset 20

---

OC1 Carbon 27.2 Offset  
0

---

**SELLA**

Prologo Akero AGX STN  
size 155mm

---

Prologo Dimension T4.0  
size 143 mm

---

Prologo Scratch-M5 Pas  
T2.0 size 140mm

---

Selle Italia SLR Boost  
SuperFlow L Manganese  
Rail

---

**PARAFANGO**

---

Orbea SKS 46S 700x45C  
Black

---

**NASTRO PER  
MANUBRIO**

Orbea  
Anti-Slippery/Shock Proof

---

**BLOQUEO ANTERIORE**

Orbea Thru Axle  
12x100mm M12xP1.5  
Hollow

---

**BLOQUEO  
POSTERIORE**

Orbea Thru Axle  
12x142mm M12xP1.5  
Hollow

---

--

---