



GAIN D20.

È DISPONIBILE IN QUESTI COLORI:



WHITE GREY (GLOSS)



BLACK - TITANI (MATT)




LICHEN GREEN (GLOSS) - BLACK (MATT)

SPECIFICHE E OPTIONAL

| | |
|----------------------------|---|
| TELAIO | Orbea Gain Hydro 6061 Hydroform Aluminum 2021, ICR cable routing, Forged BB, safety screw, 135x9 QR, Flat Mount disc mount, 700x40 maximum tyre, 1" 1/2 semiintegrated head set, 41x86,5 Pressfit bottom bracket. |
| FORCELLA | Gain Hydro carbon fork, full carbon, 1-1/8" - 1.5" tapered head tube compatible, 700x40 maximum tyre, flat mount disc mount, Thru axle 12x100mm |
| GUARNITURA | Shimano Ultegra R8000 34x50t |
| SERIE STERZO | Acros Alloy 1-1/2" Internal Cable Routing |
| MANUBRIO | OC RP20 Road Performance SL, Reach 80, Drop 125, w/Di2 hole OC1 Road, riser 15mm, reach 70mm, drop 125mm |
| ATTACCO | OC RP21 Road Performance ICR, -6°, IFC01 Computer mount interface |
| LEVE | Shimano ST-8020 |
| FRENI | Shimano R8070 Hydraulic Disc |
| PIGNONI | Shimano Ultegra R8000 11-32t 11-Speed Shimano Ultegra R8000 11-28 11-Speed |
| CAMBIO | Shimano Ultegra R8000 GS |
| DERAGLIATORE | Shimano Ultegra R8000 |
| CATENA | KMC X11 |
| RUOTE | Ready GR OC2 Carbon 42 Tubeless Ready |
| PNEUMATICO | Hutchinson Fusion 5 Performance TLR 700x30 |
| REGGISSELLA | OC 27.2 Offset 0, for integrated light |
| SELLA | Fizik Aliante R5 Fizik Antares R5 Versus EVO Regular |
| LUCE ANTERIORE | Front position light, on display holder, COB Led, On/Off, 60 Lumen, ECE50. |
| LUCE POSTERIORE | Lezyne FENDER STVZO seatpost mounting 11 lumens |
| MOTORE | Ebikemotion X35 Plus 25kmh |
| BATTERIA | Ebikemotion 36V/6.9A 248Wh ANT+ |
| RANGE EXTENDER | Ebikemotion Range Extender 5.8Ax36V = 208Wh (Extra external) |
| NASTRO PER MANUBRIO | Orbea Eva |
| DISPLAY | OC monochrome ANT+ LEV |
| CARICATORE | Ebikemotion X35 |
| REMOTE | Ebikemotion iWoc ONE |
| BLOQUEO ANTERIORE | Orbea Thru Axle 12x100mm M12x2 P1 Hollow |

GEOMETRIA

| TAGLIA | XS | S | M | L | XL |
|-------------------------|-----|------|------|------|------|
| 1 - SEAT_TUBE | 460 | 485 | 515 | 545 | 575 |
| 2 - TOP_TUBE | 507 | 530 | 547 | 571 | 589 |
| 3 - HEAD_TUBE | 97 | 122 | 146 | 172 | 196 |
| 4 - CHAIN_STAY | | | 420 | | |
| 5 - BB_HEIGHT | | | 267 | | |
| 6 - BB_DROP | | | 74 | | |
| 7 - WHEELBASE | 988 | 1002 | 1017 | 1036 | 1050 |
| 8 - HEAD_ANGLE | 71 | 71.5 | 72 | 72 | 72.5 |
| 9 - SEAT_ANGLE | 75 | 74.5 | 74.5 | 74 | 74 |
| 10 - STANDOVER | 752 | 776 | 803 | 829 | 856 |
| 11 - REACH | 366 | 377 | 388 | 399 | 410 |
| 12 - STACK | 525 | 550 | 575 | 600 | 625 |
| 13 - FORK_LENGTH | | | 400 | | |
| 14 - OFFSET | | | 50 | | |
| 15 - WHEEL_SIZE | | | 682 | | |

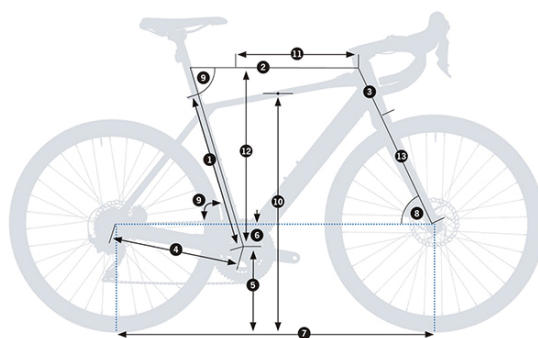

ERGONOMIA

| TAGLIA | BIELLA | ATTACCO | MANUBRIO |
|--------|--------|---------|----------|
| XS | 170 | 80 | 400 |
| S | 170 | 90 | 400 |
| M | 170 | 100 | 420 |
| L | 172 | 100 | 420 |
| XL | 175 | 110 | 440 |

* La misura del manubrio è centro-Centro