



GAIN M20 FLAT BAR.

È DISPONIBILE IN QUESTI COLORI:



SPEED SILVER (MATT) -
BLACK (GLOSS)



CORAL (GLOSS) - BLACK
(MATT)




ICE GREEN (GLOSS) - BLACK
(MATT)

SPECIFICHE E OPTIONAL

| | |
|--------------------------|---|
| TELAIO | Orbea Gain Carbon OMR monoqueue structure, Integrated Seat clamp with integrated STVZO rear light, ICR cable routing, Forged BB, 135x9 QR, Flat Mount disc, 700x40 maximun tyre, 1" 1/2 semi head set, BB386 EVO. |
| FORCELLA | Gain OMR carbon fork, with 1-1/5 carbon steerer, 700x40 maximun tyre, flat mount disc mount, 12x100mm Thru Axle, with down tube aero integration. |
| GUARNITURA | Shimano Ultegra R8000 34x50t |
| SERIE STERZO | Acros Alloy 1-1/2" Internal Cable Routing |
| MANUBRIO | Alloy 31.8mm 12mm Rise 700mm |
| ATTACCO | OC RP10 Road Performance ICR, -8°, IFC01 Computer mount interface |
| LEVE | Shimano SL-SR700 |
| FRENI | Shimano XT M8100 Hydraulic Disc |
| PIGNONI | Shimano Ultegra R8000 11-32t 11-Speed Shimano Ultegra R8000 11-28 11-Speed |
| CAMBIO | Shimano Ultegra R8000 GS |
| DERAGLIATORE | Shimano Ultegra R8000 |
| CATENA | KMC X11 |
| RUOTE | FULCRUM E-Racing 900 OC2 Carbon 42 Tubeless Ready |
| PNEUMATICO | Schwalbe ONE 30-622, 700x30C, Performance Line RaceGuard, TLE, ADDIX Schwalbe ONE Perf 700x30c, RaceGuard, TLE, ADDIX, Classic Schwalbe ONE Perf 700x30c, RaceGuard, TLE, ADDIX, Black Vittoria Rubino Pro IV G2.0 700x28c |
| REGGISELLA | OC2 Carbon 27.2 Offset 20 |
| SELLA | Fizik Aliante R5 Fizik Antares R5 Versus EVO Regular |
| LUCE ANTERIORE | Rear position light, on saddle clamp, COB Led, On/Off, 12 Lumen. STVZO |
| BATTERIA | Ebikemotion 36V/6.9A 248Wh ANT+ |
| RANGE EXTENDER | Ebikemotion Range Extender 5.8Ax36V = 208Wh (Extra external) |
| DISPLAY | Ebikemotion Pulsar One monochrome ANT+ LEV |
| CARICATORE | Ebikemotion X35 |
| REMOTE | Ebikemotion iWoc ONE |
| BLOQUEO ANTERIORE | Orbea Thru Axle 12x100mm M12x2 P1 Lite |
| CAMPANELLO | Knog Oi Classic |

GEOMETRIA

| TAGLIA | XS | S | M | L | XL |
|-------------------------|--------|---------|--------|--------|---------|
| 1 - SEAT_TUBE | 455 | 485 | 515 | 545 | 575 |
| 2 - TOP_TUBE | 507 | 530 | 547 | 571 | 589 |
| 3 - HEAD_TUBE | 80,5 | 105 | 131 | 158 | 182 |
| 4 - CHAIN_STAY | | | 420 | | |
| 5 - BB_HEIGHT | 265 | 265 | 267 | 267 | 269 |
| 6 - BB_DROP | 76 | 76 | 74 | 74 | 74 |
| 7 - WHEELBASE | 986.14 | 1000.98 | 1021.5 | 1040.6 | 1048.97 |
| 8 - HEAD_ANGLE | 71° | 71.5° | 72° | 72° | 72.5° |
| 9 - SEAT_ANGLE | 75° | 74.5° | 74.5° | 74° | 74° |
| 10 - STANDOVER | 773.68 | 785.73 | 819.5 | 839 | 872.68 |
| 11 - REACH | 366 | 377 | 388 | 399 | 410 |
| 12 - STACK | 525 | 550 | 575 | 600 | 625 |
| 13 - FORK_LENGTH | | | 400 | | |
| 14 - OFFSET | | | 50 | | |

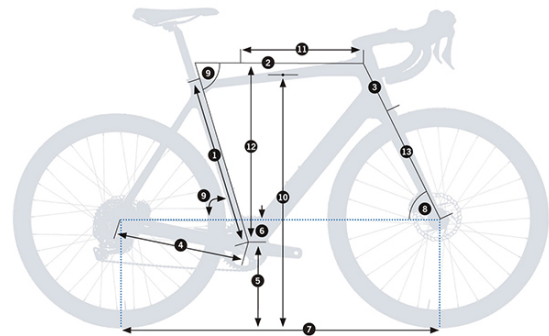

ERGONOMIA

| TAGLIA | BIELLA | ATTACCHO | MANUBRIO |
|--------|--------|----------|----------|
| XS | 170 | 80 | 700 |
| S | 170 | 90 | 700 |
| M | 170 | 100 | 700 |
| L | 172 | 100 | 700 |
| XL | 175 | 110 | 700 |

* La misura del manubrio è centro-Centro