



GAIN M30 IX.

È DISPONIBILE IN QUESTI COLORI:



SPEED SILVER (MATT) -
BLACK (GLOSS)



CORAL (GLOSS) - BLACK
(MATT)




ICE GREEN (GLOSS) - BLACK
(MATT)

SPECIFICHE E OPTIONAL

TELAIO	Orbea Gain Carbon OMR monocoque structure, Integrated Seat clamp with integrated STVZO rear light, ICR cable routing, Forged BB, 135x9 QR, Flat Mount disc, 700x40 maximum tyre, 1" 1/2 semi head set, BB386 EVO.
FORCELLA	Gain OMR carbon fork, with 1-1/5 carbon steerer, 700x40 maximum tyre, flat mount disc mount, 12x100mm Thru Axle, with down tube aero integration.
GUARNITURA	Shimano GRX RX600 40t
SERIE STERZO	Acros Alloy 1-1/2" Internal Cable Routing
MANUBRIO	OC GR30 Gravel, Reach 80, Drop 125, Flare 12, w/Di2 hole
	OC GR30-R Gravel Riser, Reach 70, Drop 125, Flare 12, Rise 15
	OC2 Road Carbon, reach 80mm, drop 125mm
ATTACCO	OC RP10 Road Performance ICR, -8°, IFC01 Computer mount interface
LEVE	Shimano ST-RX600
FRENI	Shimano RX400 Hydraulic disc
PIGNONI	Shimano CS-M7000 11-40t 11-Speed
CAMBIO	Shimano RX812 GS
CATENA	Shimano HG 601
RUOTE	FULCRUM E-Racing 900
	OC2 Carbon 42 Tubeless Ready
PNEUMATICO	Schwalbe G-ONE Bite, 40-622, 700x38C, Performance Line RaceGuard, TLE, ADDIX Classic Skin
REGGISELLA	OC2 Carbon 27.2 Offset 20
SELLA	Fizik Aliante R5
	Fizik Antares R5 Versus EVO Regular
LUCE ANTERIORE	Rear position light, on saddle clamp, COB Led, On/Off, 12 Lumen. STVZO
BATTERIA	Ebikemotion 36V/6.9A 248Wh ANT+
RANGE EXTENDER	Ebikemotion Range Extender 5.8Ax36V = 208Wh (Extra external)
NASTRO PER MANUBRIO	Orbea Anti-Slippery/Shock Proof
DISPLAY	Ebikemotion Pulsar One monochrome ANT+ LEV
CARICATORE	Ebikemotion X35
REMOTE	Ebikemotion iWoc ONE
BLOQUEO ANTERIORE	Orbea Thru Axle 12x100mm M12x2 P1 Lite

GOMETRIA

TAGLIA	XS	S	M	L	XL
1 - SEAT_TUBE	455	485	515	545	575
2 - TOP_TUBE	507	530	547	571	589
3 - HEAD_TUBE	80,5	105	131	158	182
4 - CHAIN_STAY			420		
5 - BB_HEIGHT	265	265	267	267	269
6 - BB_DROP	76	76	74	74	74
7 - WHEELBASE	986.14	1000.98	1021.5	1040.6	1048.97
8 - HEAD_ANGLE	71°	71.5°	72°	72°	72.5°
9 - SEAT_ANGLE	75°	74.5°	74.5°	74°	74°
10 - STANDOVER	773.68	785.73	819.5	839	872.68
11 - REACH	366	377	388	399	410
12 - STACK	525	550	575	600	625
13 - FORK_LENGTH			400		
14 - OFFSET			50		

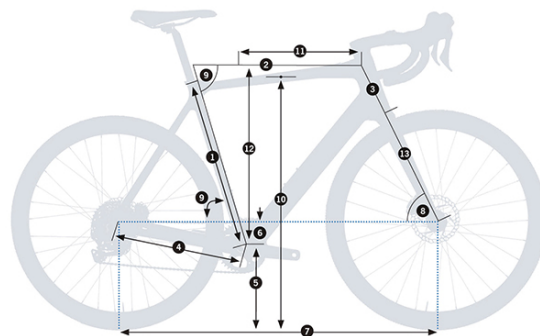

ERGONOMIA

TAGLIA	BIELLA	ATTACCO	MANUBRIO
XS	170	80	400
S	170	90	400
M	170	100	420
L	172	100	420
XL	175	110	440

* La misura del manubrio è centro-Centro