



RALLON MIO.

È DISPONIBILE IN QUESTI COLORI:



METALLIC MULBERRY
(GLOSS-MATT)



GOLDEN SAND-NIGHT BLACK
(MATT)



JADE GREEN CARBON
(GLOSS)-STONE SILVER
(MATT)


SPECIFICHE E OPTIONAL

TELAIO	Orbea Monocoque Race Carbon. Advanced Dynamics 160mm suspension technology. 29" wheels. Concentric Boost 12x148 rear axle. Pure Enduro geometry. Internal cable routing. ISCG05
AMMORTIZZATORE	Fox FLOAT X Performance 2-Position Evol LV custom tune 230x60mm
	Fox Float X2 Factory 2-Pos Adjust Kashima cm tune 230x60mm
	Fox DHX2 Factory 2-Pos Adjust SLS Spring Cr 230x60mm 400lbs
	Fox DHX2 Factory 2-Pos Adjust SLS Spring Cr 230x60mm 450lbs
	Fox DHX2 Factory 2-Pos Adjust SLS Spring Cr 230x60mm 500lbs
	Fox DHX2 Factory 2-Pos Adjust SLS Spring Cr 230x60mm 550lbs
FORCELLA	Fox 38 Float Performance 170 Grip 3-Position QR15x110
GUARNITURA	SRAM GX Eagle Dub Lunar Boost 32t
SERIE STERZO	Acros Alloy 1-1/8 - 1-1/2" Integrated
MANUBRIO	Race Face Aeffect 35 20mm Rise 780mm
	Race Face Next R 35 Rise 800mm + Turbine R Kit (Bar+Stem)
ATTACCO	Race Face Aeffect R 35mm interface
LEVE	SRAM GX Eagle Lunar
FRENI	Shimano XT M8120 Hydraulic Disc
PIGNONI	SRAM XG-1275 Eagle 10-52t 12-Speed
CAMBIO	SRAM GX Eagle Lunar
CATENA	SRAM GX Eagle 12-Speed
RUOTE	Race Face TURBINE-R30 TLR 15/110mm IS
	Race Face TURBINE-R 30 TLR IS (29" Front / 27,5" Rear)
PNEUMATICO	Maxxis Assegai 2.50" WT FB 120 TPI 3C Maxx Terra EXO+ TR
PNEUMATICO	Maxxis Minion DHR II 2.40" WT FB 120 TPI 3C Maxx Terra Exo+ TR
REGGISELLA	OC MC20 Mountain Control Dropper, 31,6mm
	OC MC20 Mountain Control Dropper, 31,6mm, 125mm travel
	OC MC20 Mountain Control Dropper, 31,6mm, 150mm travel
	OC MC20 Mountain Control Dropper, 31,6mm, 170mm travel
	OC MC20 Mountain Control Dropper, 31,6mm, 200mm travel
REMOTO REGGISELLA	Shimano SL-MT500 I-Spec EV
SELLA	Fizik Taiga S-alloy rail
	Fizik Taiga Kium rail
TENDICATENA	e*thirteen CL52 30-36t black
BLOQUEO ANTERIORE	
	Fox Kabolt Boost
PORTA ATTREZZI	Accessories Containers

GEOMETRIA

TAGLIA	S H/L	M H/L	L H/L	XL H/L	S-MT	M-MT	L-MT	XL-MT
1 - SEAT_TUBE	415	415	435	460	415	415	435	460
2 - TOP_TUBE	572	599	626	653	573	600	627	655
3 - HEAD_TUBE	90	100	110	120	90	100	110	120
4 - CHAIN_STAY	440	440	440	440	438	438	438	438
5 - BB_HEIGHT*	343/336	343/336	343/336	343/336	343	343	343	343
6 - BB_DROP*	28/35	28/35	28/35	28/35	35	35	35	35
7 - WHEELBASE	1202	1231	1260	1290	1201	1230	1260	1289
8 - HEAD_ANGLE*	64,5°/64°	64,5°/64°	64,5°/64°	64,5°/64°	64°	64°	64°	64°
9 - SEAT_ANGLE*	77,5°/77°	77,5°/77°	77,5°/77°	77,5°/77°	77°	77°	77°	77°
10 - STANDOVER	737	737	754	774	744	744	761	781
11 - REACH	435	460	485	510	430	455	480	505
12 - STACK	619	628	637	646	623	632	641	650
13 - FORK_LENGTH	587,7							

*

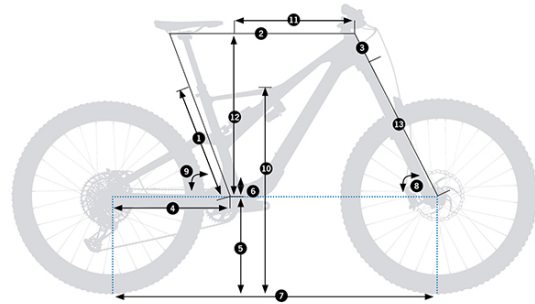

ERGONOMIA

TAGLIA	BIELLA	ATTACCHO	MANUBRIO	REGGISELLA TELESCOPICO
S	165	40	780	440/150
M	165	40	780	440/150
L	170	50	780	480/170
XL	170	50	780	550/200

* La misura del manubrio è centro-Centro

STRUMENTI

OC axle lever (Hex 6 & valve core removal) + OC
Multitool (Hex 2, 3, 4 & 5)