



TERRA M20I.

È DISPONIBILE IN QUESTI COLORI:



GIALLO-NERO



ANTRACITE GLITTER (LUCIDO)
/ NERO (OPACO)



NERO-BRIGHT RED (OPACO)

SPECIFICHE E OPTIONAL

| | |
|---------------------|--|
| TELAIO | Orbea Terra carbon OMP disc, monocoque construction, tapered 1-1/8" - 1,5", PF30, powermeter compatible, Thru Axle 12mm x 142mm rear, thread M12x P1.5, internal cable routing, EC/DC compatible, SP 27,2mm. |
| FORCELLA | Orbea Terra OMP carbon disc fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts Thru axle 12mm x 100m, thread M12xP1.5, MMS system |
| GUARNITURA | Shimano GRX RX810 31x48t |
| SERIE STERZO | FSA 1-1/8 - 1-1/2" Integrated Carbon Cup ACB Bearings |
| MANUBRIO | OC1 All Road, reach 80mm, drop 125mm, flare 12° |
| | OC1 Road, reach 80mm, drop 125mm |
| | OC1 Road, riser 15mm, reach 70mm, drop 125mm |
| | OC2 Road Carbon, reach 80mm, drop 125mm |
| ATTACCO | OC2 Road -8° |
| LEVE | Shimano ST-RX815 |
| FRENI | Shimano BR-RX810 Hydraulic disc |
| PIGNONI | Shimano Ultegra HG800 11-34t 11-Speed |
| | Shimano Ultegra R8000 11-30 11-Speed |
| | Shimano Ultegra R8000 11-32 11-Speed |
| CAMBIO | Shimano RD-RX815 |
| DERAGLIATORE | Shimano FD-RX815 |
| CATENA | Shimano HG 601 |
| RUOTE | FULCRUM Rapid Red 900 DB |


GEOMETRIA

| TAGLIA | XS | S | M | L | XL |
|-------------------------|-------|------|------|------|------|
| 1 - SEAT_TUBE | 460 | 510 | 554 | 590 | 630 |
| 2 - TOP_TUBE | 531 | 543 | 555 | 570 | 585 |
| 3 - HEAD_TUBE | 122 | 138 | 156 | 182 | 212 |
| 4 - CHAIN_STAY | 430 | | | | |
| 5 - BB_HEIGHT | 283 | 283 | 285 | 285 | 288 |
| 6 - BB_DROP | 70 | 70 | 68 | 68 | 65 |
| 7 - WHEELBASE | 1017 | 1030 | 1043 | 1060 | 1078 |
| 8 - HEAD_ANGLE | 70.5° | | | | |
| 9 - SEAT_ANGLE | 73.5° | | | | |
| 10 - STANDOVER | 764 | 796 | 828 | 858 | 893 |
| 11 - REACH | 370 | 378 | 385 | 392 | 400 |
| 12 - STACK | 545 | 560 | 575 | 600 | 625 |
| 13 - FORK_LENGTH | 400 | | | | |

ERGONOMIA

| TAGLIA | BIELLA | ATTACCHO | MANUBRIO |
|-----------|--------|----------|----------|
| XS | 170 | 100 | 420 |
| S | 170 | 100 | 420 |
| M | 172 | 110 | 420 |
| L | 172 | 110 | 440 |
| XL | 175 | 120 | 440 |

* La misura del manubrio è centro-Centro

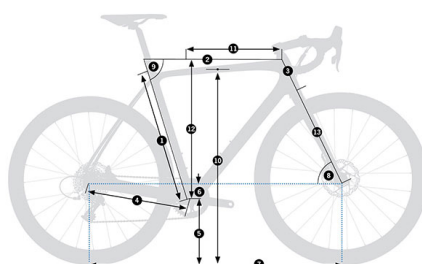

| | |
|--------------------------------|---|
| | Vision 40 SC Disc Carbon TLR CL |
| | FULCRUM Racing 800 DB |
| | FULCRUM Racing 700 DB |
| | FULCRUM Rapid Red 500 DB AFS |
| PNEUMATICO | Vittoria Terreno Dry Gravel G2.0 TNT 700x38c |
| | Vittoria Rubino Pro IV G2.0 TLR 700x28c |
| | Hutchinson Fusion 5 Performance TLR 700x30 |
| PEDALI | N/A |
| REGGISELLA | OC2 Carbon 27.2 Offset 20 |
| | OC1 Carbon 27.2 Offset 0 |
| SELLA | Prologo Akero AGX STN size 155mm |
| | Prologo Dimension T4.0 size 143 mm |
| | Prologo Scratch-M5 Pas T2.0 size 140mm |
| | Selle Italia SLR Boost SuperFlow L Manganese Rail |
| PARAFANGO | |
| | Orbea SKS 46S 700x45C Black |
| NASTRO PER MANUBRIO | Orbea Anti-Slippery/Shock Proof |
| BLOQUEO ANTERIORE | Orbea Thru Axle 12x100mm M12xP1.5 Hollow |
| BLOQUEO POSTERIORE | Orbea Thru Axle 12x142mm M12xP1.5 Hollow |
| -- | |