



ALMA M30.

È DISPONIBILE IN QUESTI COLORI:



GREEN SAVAGE-BRIGHT RED
(MATT)



GLITTER ANTHRACITE-BLACK
(GLOSS)




ICE GREEN (MATT-GLOSS)

SPECIFICHE E OPTIONAL

TELAIO	Orbea Alma Carbon OMR, Boost 12x148, PF BB, Internal cable routing.
FORCELLA	RockShox SID SL RL remote Q15X110 Boost DebonAir 100mm
GUARNITURA	Shimano MT611 32t
SERIE STERZO	FSA 1-1/8 - 1-1/2" Integrated
MANUBRIO	OC1 Flat 31.8mm 740mm
ATTACCO	OC1 31.8mm interface -7°
LEVE	Shimano SLX M7100 I-Spec EV
FRENI	Shimano M6100 Hydraulic Disc Shimano XT M8100 Hydraulic Disc
PIGNONI	Shimano CS-M7100 10-51t 12-Speed
CAMBIO	Shimano XT M8100 SGS Shadow Plus
CATENA	Shimano M6100
RUOTE	Orbea OC1 25c Tubeless Ready
PNEUMATICO	Maxxis Rekon Race 2.35" 120 TPI Exo TLR
REGGISELLA	OC2 forge head 27.2 Offset 0
SELLA	Selle Italia Model X FecAlloy Rail 145x248mm Women Kit: OC Grips OD29mm&Selle Italia SLR Boost SuperFlow
TENDICATENA	
BLOCCO REMOTO	Rock Shox OneLoc

GEOMETRIA

TAGLIA	S	M	L	XL
1 - SEAT_TUBE	400	445	483	533
2 - TOP_TUBE	559	593	618	647
3 - HEAD_TUBE	90	100	110	125
4 - CHAIN_STAY		430		
5 - BB_HEIGHT		309		
6 - BB_DROP		61		
7 - WHEELBASE	1083	1118	1144	1175
8 - HEAD_ANGLE		68		
9 - SEAT_ANGLE		74,5		
10 - STANDOVER	693	729	749	819
11 - REACH	395	426	448	474
12 - STACK	593	602	612	625
13 - FORK_LENGTH		500,8		
14 - OFFSET		44		

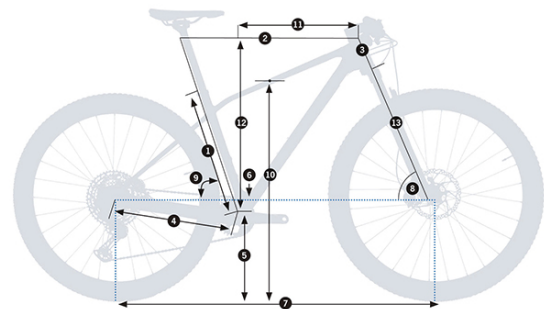

ERGONOMIA

TAGLIA	BIELLA	ATTACCHO	MANUBRIO
S	170	60	740
M	175	70	740
L	175	70	740
XL	175	90	740

* La misura del manubrio è centro-Centro