



## GAIN M20 IX.

È DISPONIBILE IN QUESTI COLORI:



SPEED SILVER (MATT) -  
BLACK (GLOSS)



CORAL (GLOSS) - BLACK  
(MATT)




ICE GREEN (GLOSS) - BLACK  
(MATT)

## SPECIFICHE E OPTIONAL

<b>TELAIO</b>	Orbea Gain Carbon OMR monocoque structure, Integrated Seat clamp with integrated STVZO rear light, ICR cable routing, Forged BB, 135x9 QR, Flat Mount disc, 700x40 maximun tyre, 1" 1/2 semi head set, BB386 EVO.
<b>FORCELLA</b>	Gain OMR carbon fork, with 1-1/5 carbon steerer, 700x40 maximun tyre, flat mount disc mount, 12x100mm Thru Axle, with down tube aero integration.
<b>GUARNITURA</b>	Shimano GRX RX810 40t
<b>SERIE STERZO</b>	Acros Alloy 1-1/2" Internal Cable Routing
<b>MANUBRIO</b>	OC GR30 Gravel, Reach 80, Drop 125, Flare 12, w/Di2 hole
	OC GR30-R Gravel Riser, Reach 70, Drop 125, Flare 12, Rise 15
	OC2 Road Carbon, reach 80mm, drop 125mm
<b>ATTACCO</b>	OC RP10 Road Performance ICR, -8°, IFC01 Computer mount interface
<b>LEVE</b>	Shimano ST-RX810
<b>FRENI</b>	Shimano ST-RX810
<b>PIGNONI</b>	Shimano CS-M8000 11-40t 11-Speed
<b>CAMBIO</b>	Shimano RX812 GS
<b>CATENA</b>	Shimano HG 601
<b>RUOTE</b>	FULCRUM E-Racing 900
	OC2 Carbon 42 Tubeless Ready
<b>PNEUMATICO</b>	Schwalbe G-ONE Bite, 40-622, 700x38C, Performance Line RaceGuard, TLE, ADDIX Classic Skin
<b>REGGISELLA</b>	OC2 Carbon 27.2 Offset 20
<b>SELLA</b>	Fizik Aliante R5
	Fizik Antares R5 Versus EVO Regular
<b>LUCE ANTERIORE</b>	Rear position light, on saddle clamp, COB Led, On/Off, 12 Lumen. STVZO
<b>BATTERIA</b>	Ebikemotion 36V/6.9A 248Wh ANT+
<b>RANGE EXTENDER</b>	Ebikemotion Range Extender 5.8Ax36V = 208Wh (Extra external)
<b>NASTRO PER MANUBRIO</b>	Orbea Anti-Slippery/Shock Proof
<b>DISPLAY</b>	Ebikemotion Pulsar One monochrome ANT+ LEV
<b>CARICATORE</b>	Ebikemotion X35
<b>REMOTE</b>	Ebikemotion iWoc ONE
<b>BLOQUEO ANTERIORE</b>	Orbea Thru Axle 12x100mm M12x2 P1 Lite

## GEOMETRIA

TAGLIA	XS	S	M	L	XL
<b>1 - SEAT_TUBE</b>	455	485	515	545	575
<b>2 - TOP_TUBE</b>	507	530	547	571	589
<b>3 - HEAD_TUBE</b>	80,5	105	131	158	182
<b>4 - CHAIN_STAY</b>			420		
<b>5 - BB_HEIGHT</b>	265	265	267	267	269
<b>6 - BB_DROP</b>	76	76	74	74	74
<b>7 - WHEELBASE</b>	986.14	1000.98	1021.5	1040.6	1048.97
<b>8 - HEAD_ANGLE</b>	71°	71.5°	72°	72°	72.5°
<b>9 - SEAT_ANGLE</b>	75°	74.5°	74.5°	74°	74°
<b>10 - STANDOVER</b>	773.68	785.73	819.5	839	872.68
<b>11 - REACH</b>	366	377	388	399	410
<b>12 - STACK</b>	525	550	575	600	625
<b>13 - FORK_LENGTH</b>			400		
<b>14 - OFFSET</b>			50		

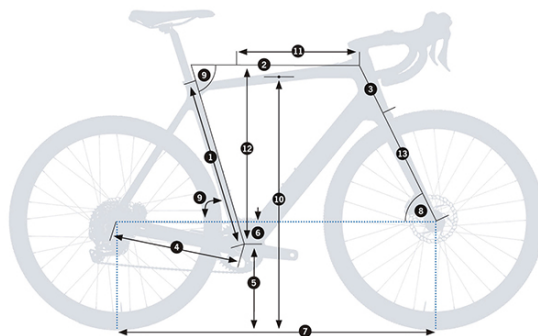

## ERGONOMIA

TAGLIA	BIELLA	ATTACCHO	MANUBRIO
XS	170	80	400
S	170	90	400
M	170	100	420
L	172	100	420
XL	175	110	440

\* La misura del manubrio è centro-Centro