



## WILD FS MIO.

È DISPONIBILE IN QUESTI COLORI:



RED WINE CARBON  
(GLOSS)-CARBON RAW  
(MATT)




STONE SILVER (MATT)-JADE  
GREEN CARBON (GLOSS)

## SPECIFICHE E OPTIONAL

<b>TELAIO</b>	ORBEA WILD Full Suspension 2021 Carbon 160mm Travel, FRONT TRIANGLE: Carbon, REAR TRIANGLE: Carbon, FiberLink, BATTERY COVER: Carbon, Boost 12x148 Bosch Gen4
<b>AMMORTIZZATORE</b>	Fox Float DPS Performance Trunnion 3-Position Evol LV custom tune 205x65mm Fox Float X2 Factory Trunnion 2-Pos Kashima cm tune 205x65mm
<b>FORCELLA</b>	Fox 38 Float Performance 160 Grip 3-Position QR15x110 E-Bike Optimized Fox 38 Float Factory 160 Grip2 QR15x110 Kashima for E-Bike
<b>GUARNITURA</b>	PW-NW32-G4
<b>PEDIVELLA</b>	e*thirteen Plus Alu
<b>SERIE STERZO</b>	OC Key Holder
<b>MANUBRIO</b>	Race Face Aeffect 35 20mm Rise 780mm
<b>ATTACCO</b>	Race Face Aeffect R 35mm interface
<b>LEVE</b>	Shimano SLX M7100 I-Spec EV
<b>FRENI</b>	Shimano XT M8120 Hydraulic Disc
<b>PIGNONI</b>	Shimano CS-M7100 10-51t 12-Speed
<b>CAMBIO</b>	Shimano XT M8100 SGS Shadow Plus
<b>CATENA</b>	Shimano M6100
<b>RUOTE</b>	DT Swiss H-1900 Spline 30c TLR 15/110mm 6-Bolt
<b>PNEUMATICO</b>	Maxxis Minion DHF 2.60" 120 TPI FB 3C Maxx Terra Exo+ TR
<b>PNEUMATICO</b>	Maxxis Minion DHR II 2.60" 120 TPI FB 3C Maxx Terra Exo+ TR
<b>REGGISELLA</b>	OC MC20 Mountain Control Dropper, 31,6mm OC MC20 Mountain Control Dropper, 31,6mm, 125mm travel OC MC20 Mountain Control Dropper, 31,6mm, 150mm travel OC MC20 Mountain Control Dropper, 31,6mm, 170mm travel
<b>REMOTO REGGISELLA</b>	Shimano SL-MT500 I-Spec EV
<b>SELLA</b>	Fizik Aidon 208x145mm manganese rail
<b>LUCE ANTERIORE</b>	Lezyne MACRO DRIVE X lock (front)+Lezyne FEMTO STVZO (rear)
<b>LUCCHETTO</b>	Abus battery powertube lock PLUS
<b>TENDICATENA</b>	Orbea OC chainguide 32-38t
<b>MOTORE</b>	BOSCH Performance CX Cruise (25km/h) BDU450CX
<b>BATTERIA</b>	BOSCH Powertube 625Wh Horizontal BBP290
<b>DUAL BATTERY</b>	Dual Battery connection (no battery)
<b>DISPLAY</b>	BOSCH Display unit KIOX Black BUI330
<b>CARICATORE</b>	Compact Charger 2A (100-240V) Worldwide Fast Charger 6A (220-240V)

## GOMETRIA

TAGLIA	S/M	L/G	XL
<b>1 - SEAT_TUBE</b>	406	444	483
<b>2 - TOP_TUBE</b>	585	612	645
<b>3 - HEAD_TUBE</b>	100	110	125
<b>4 - CHAIN_STAY</b>		455	
<b>5 - BB_HEIGHT</b>		345	
<b>6 - BB_DROP</b>		30	
<b>7 - WHEELBASE</b>	1203	1232	1268
<b>8 - HEAD_ANGLE</b>		65,5°	
<b>9 - SEAT_ANGLE</b>		76°	
<b>10 - STANDOVER</b>	725	740	765
<b>11 - REACH</b>	430	455	485
<b>12 - STACK</b>	621	630	644
<b>13 - FORK_LENGTH</b>		570	
<b>14 - OFFSET</b>		44	

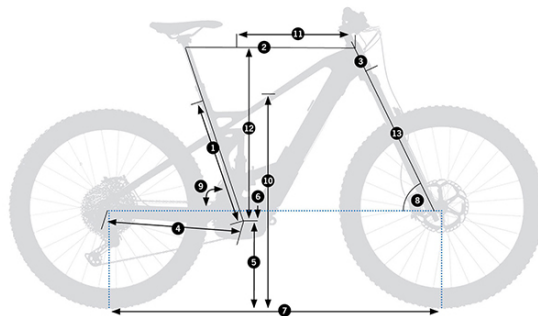

## ERGONOMIA

TAGLIA	BIELLA	ATTACCO	MANUBRIO	REGGISELLA TELESCOPICO
<b>S/M</b>	160	40	780	390/125
<b>L</b>	160	50	780	440/150
<b>XL</b>	160	50	780	480/170

\* La misura del manubrio è centro-Centro